



90° belt transfer system to vacuum chamber

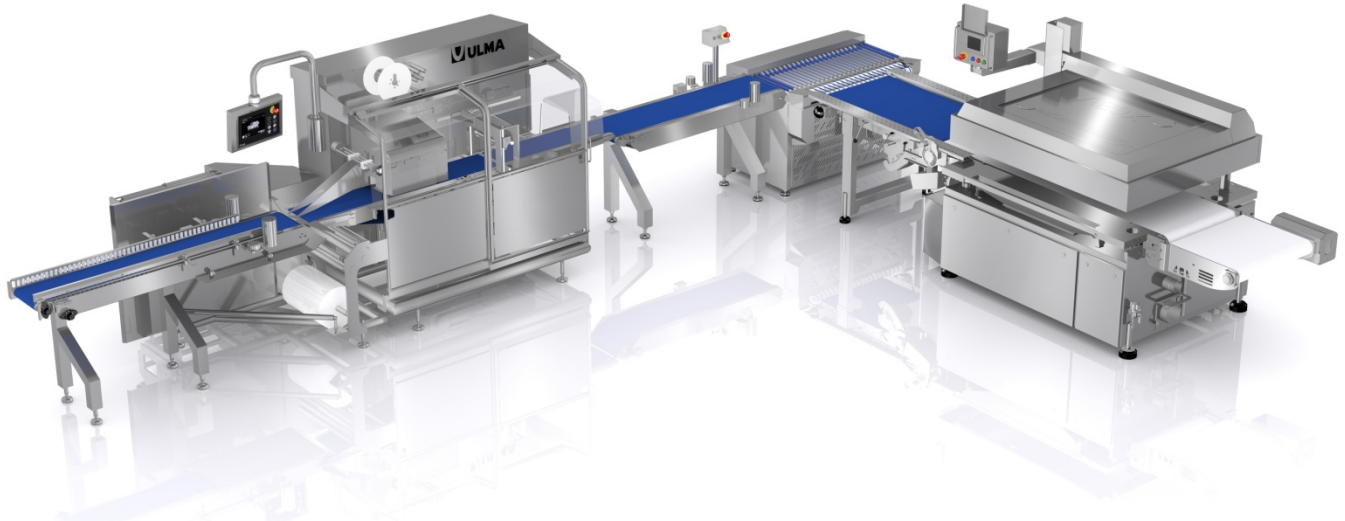

- Automated feeding between Flow Pack machine and vacuum chamber.
- Product's length recognition and real time synchronization.
- Maximum eficiencia and less sealing area with intermédiata buffer between packager and chamber.
- Up to 35 ppm without operator.


PATENTED TECHNOLOGY

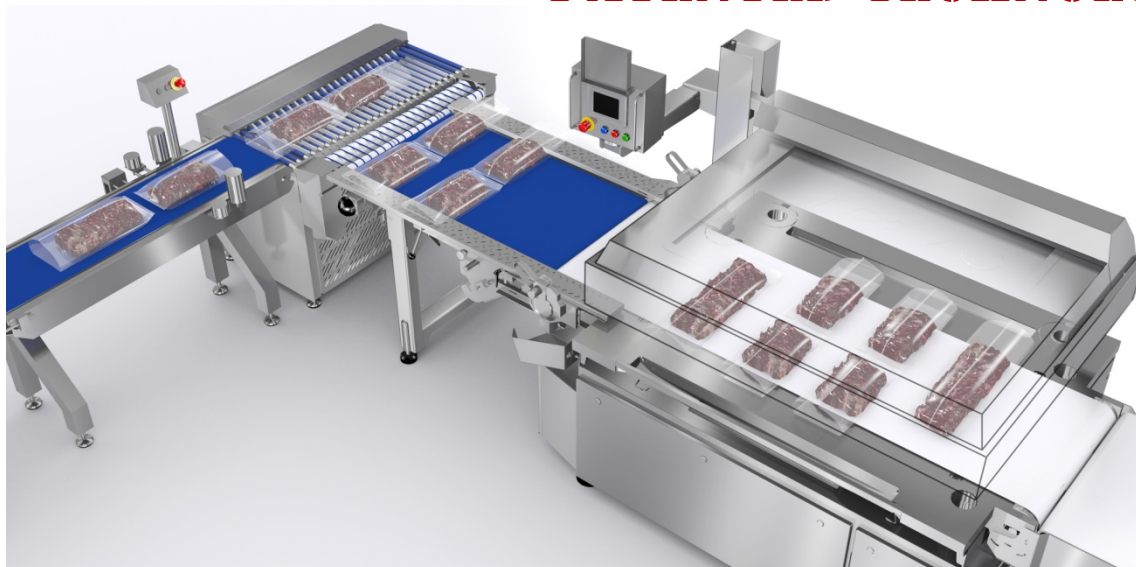

For variable length meat products



ULMA Packaging
B° Garibai 28
20560 OÑATI (Guipúzcoa) SPAIN
Tel.: +34 – 943 73 92 00
Fax.: +38 – 943 78 08 19
Web: www.ulmapackaging.com
e-mail: info@ulmapackaging.com

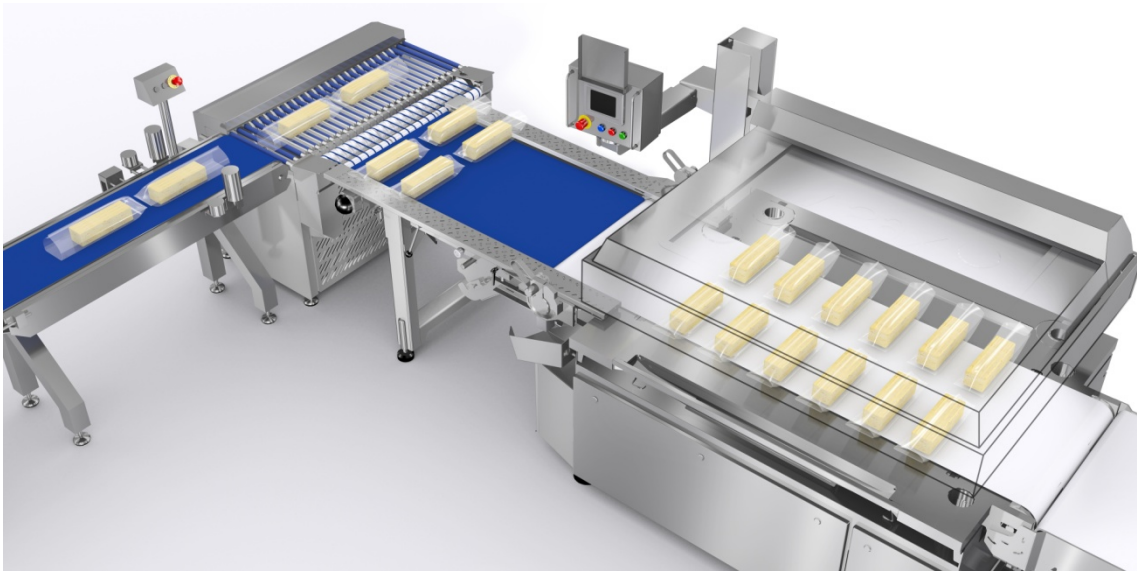

Ideal for vacuum packed cheese applications

90° TRANSFER SYSTEM CHARACTERISTICS

- Composed by a feeding belt and a transfer system of rollers and pulling straps.
- Feeding belt is 1,5 mts long and it's made entirely of stainless steel. Designed to remove the belt and dismantle its structure for a easier hygiene and cleaning.
- The 90° transfer system is formed by a series of motorized rollers which move the product in longitudinal direction and transport straps for perpendicular movement so products can be transferred to the infeed belt of vacuum chamber.
- It can be integrated with all existing ULMA FLOW-VAC® models (FV 35, FV 45 and FV 55).
- It allows to feed all existing belt vacuum systems on the market (upt to 900 mm distance between sealing bars).

Maximum speed :Up to 30-35 packs/min
(depending on product's dimensions)

FLOW-VAC® SYSTEM CHARACTERISTIC

- Creates shrink vacuum bags from a barrier roll stock film.
- Bag lengths are automatically sized according to product length.
- Can be linked to a wide variety of vacuum and shrink systems.

FLOW-VAC® SYSTEM BENEFITS

- Process automation with high flexibility.
- Most efficient process.
- Less operators.
- Packaging material optimization.
- Increased productivity.
- Less product handling and contamination.
- Low reject rates.
- Less material inventory and easier logistics.
- Better pack appearance (pack size better adjusted to product size).



ULMA Packaging
B° Garibai 28
20560 OÑATI (Guipúzcoa) SPAIN
Tel.: +34 – 943 73 92 00
Fax.:+38 – 943 78 08 19
Web: www.ulmapackaging.com
e-mail: info@ulmapackaging.com